



# DL DuraLok™



## Dual-Locking, Heavy-Duty Power & Signal Connectors

Available in 38 position (6 x Power/32 x Signal Configuration)

Amphenol Sine Systems' **DuraLok™ Dual-Locking Connectors** are high-density, heavy-duty, environmentally-sealed connectors available in both Plugs and Receptacles. The robust, integrated locking lever, built directly into the Plug housing, ensures a secure mating with the Receptacle every time.

All Plugs and Receptacles are IP67/69K rated (mated).




### Key Features

- Integrated Locking Lever
- Combined Power & Signal In One
- A, B & C Keying Options

**Applications:** Heavy Equipment, Agriculture, Construction, Transportation, Off-Road, Mining, Industrial, Railway, Automotive, Diagnostics, Marine, Water Resistance, Harsh Environments

### Technical Specifications

Temperature Range	-40°C to +125°C
Max. Current (AMP)	13A (Power), 5A (Signal)
Voltage Rating (AC/DC)	250V
IP Rating	IP67/69K (mated)
Min. Mating Cycles	> 500
Dielectric Value	Less than 2 mA current leakage @2000V AC
Insulation Resistance	500 megohms minimum
Contact Type	Stamped & Formed
Contact Material	Copper Alloy
Contact Plating	Tin (Standard); Gold or Nickel Plating (Optional)
Body Material (Shell, Locking Lever, End Cap)	Thermoplastic UL94 V-0
Wire Seal/Gasket	Silicone Rubber
RoHS	Compliant






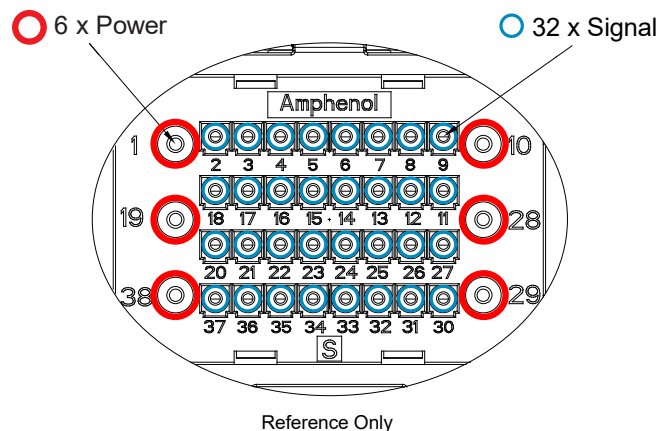


**A Series™ Family**



Standard products. Custom solutions  
Customer Service +1 800 394 7732

DuraLok™ Plug Dimensions (in mm) & Keying Options (A, B and C)




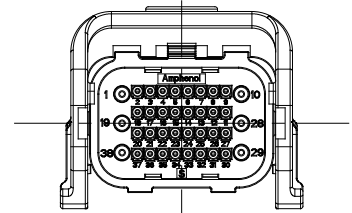




Plug - Key A (ATV06-38SA-Sx)

Plug - Key B (ATV06-38SB-Sx)

Plug - Key C (ATV06-38SC-Sx)

DuraLok™ Receptacle Dimensions (in mm) & Keying Options (A, B and C)

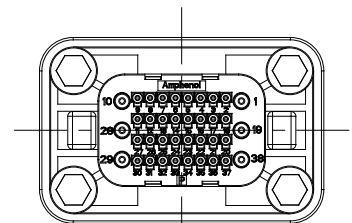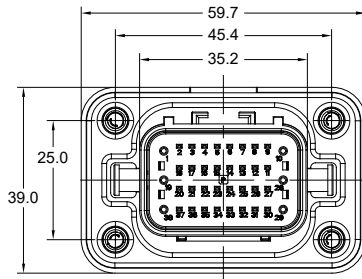


Receptacle - Key A (ATV04-38PA-Sx)

Receptacle - Key B (ATV04-38PB-Sx)

Receptacle - Key C (ATV04-38PC-Sx)

DuraLok™ Receptacle Panel Cutout Dimensions (in mm)

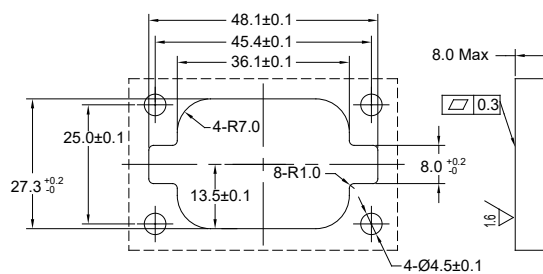

Receptacle - Panel Cutout

Image	Part Number	Description	Wire Range	Amp	Volt
	ATV06-38SA-S2	38 Position, Plug, Socket, DuraLok™, Power and Signal, Standard Seal, Keyed A, Grey	20AWG (Ø1.5-1.8mm) Signal 14-22AWG (Ø1.6-2.8mm) Power	13A	250V
	ATV04-38PA-S2	38 Position, Receptacle, Pin, DuraLok™, Power and Signal, Standard Seal, Keyed A, Grey	20AWG (Ø1.5-1.8mm) Signal 14-22AWG (Ø1.6-2.8mm) Power	13A	250V
	ATV06-38SB-S2	38 Position, Plug, Socket, DuraLok™, Power and Signal, Standard Seal, Keyed B, Grey	20AWG (Ø1.5-1.8mm) Signal 14-22AWG (Ø1.6-2.8mm) Power	13A	250V
	ATV04-38PB-S2	38 Position, Receptacle, Pin, DuraLok™, Power and Signal, Standard Seal, Keyed B, Grey	20AWG (Ø1.5-1.8mm) Signal 14-22AWG (Ø1.6-2.8mm) Power	13A	250V
	ATV06-38SC-S2	38 Position, Plug, Socket, DuraLok™, Power and Signal, Standard Seal, Keyed C, Grey	20AWG (Ø1.5-1.8mm) Signal 14-22AWG (Ø1.6-2.8mm) Power	13A	250V
	ATV04-38PC-S2	38 Position, Receptacle, Pin, DuraLok™, Power and Signal, Standard Seal, Keyed C, Grey	20AWG (Ø1.5-1.8mm) Signal 14-22AWG (Ø1.6-2.8mm) Power	13A	250V
	PL000761	Dust Cap for Recept, DuraLok™, White	-	-	-
	PL000762	Dust Cap for Plug, DuraLok™, White	-	-	-

Image	Part Number	Description	Wire Range	Amp
	SC000571T	Pin Contact, Stamped & Formed, Signal, Size 1.0x0.64mm, Tin Plating *Commonly Stocked Contacts	20-22AWG (0.34-0.50mm <sup>2</sup> )	5A
	SC000572T	Socket Contact, Stamped & Formed, Signal, Size 1.0x0.64mm, Tin Plating *Commonly Stocked Contacts	20-22AWG (0.34-0.50mm <sup>2</sup> )	5A
	SC000571F	Pin Contact, Stamped & Formed, Signal, Size 1.0x0.64mm, Gold Flash	20-22AWG (0.34-0.50mm <sup>2</sup> )	5A
	SC000572F	Socket Contact, Stamped & Formed, Signal, Size 1.0x0.64mm, Gold Flash	20-22AWG (0.34-0.50mm <sup>2</sup> )	5A
	SC000571Gx	Pin Contact, Stamped & Formed, Signal, Size 1.0x0.64mm, Gold Plating <b>G5</b> = 5μ" Gold Plating; <b>G10</b> = 10μ" Gold Plating <b>G15</b> = 15μ" Gold Plating; <b>G30</b> = 30μ" Gold Plating	20-22AWG (0.34-0.50mm <sup>2</sup> )	5A
	SC000572Gx	Socket Contact, Stamped & Formed, Signal, Size 1.0x0.64mm, Gold Plating <b>G5</b> = 5μ" Gold Plating; <b>G10</b> = 10μ" Gold Plating <b>G15</b> = 15μ" Gold Plating; <b>G30</b> = 30μ" Gold Plating	20-22AWG (0.34-0.50mm <sup>2</sup> )	5A
	SC000571N	Pin Contact, Stamped & Formed, Signal, Size 1.0x0.64mm, Nickel Plating	20-22AWG (0.34-0.50mm <sup>2</sup> )	5A
	SC000572N	Socket Contact, Stamped & Formed, Signal, Size 1.0x0.64mm, Nickel Plating	20-22AWG (0.34-0.50mm <sup>2</sup> )	5A
	SP14M2F	Pin Contact, Stamped & Formed, Size 16, 3 Tangs, Gold Flash over Nickel *Commonly Stocked Contacts	14-16AWG (2.0-2.5mm <sup>2</sup> )	13A
	SS14M2F	Socket Contact, Stamped & Formed, Size 16, 3 Tangs, Gold Flash over Nickel *Commonly Stocked Contacts	14-16AWG (2.0-2.5mm <sup>2</sup> )	13A
	SP14M2Gx	Pin Contact, Stamped & Formed, Size 16, 3 Tangs, Gold over Nickel <b>G5</b> = 5μ" Gold over Nickel; <b>G10</b> = 10μ" Gold over Nickel <b>G15</b> = 15μ" Gold over Nickel; <b>G30</b> = 30μ" Gold over Nickel	14-16AWG (2.0-2.5mm <sup>2</sup> )	13A

Image	Part Number	Description	Wire Range	Amp
	SS14M2Gx	Socket Contact, Stamped & Formed, Size 16, 3 Tangs, Gold over Nickel <b>G5</b> = 5μ" Gold over Nickel; <b>G10</b> = 10μ" Gold over Nickel <b>G15</b> = 15μ" Gold over Nickel; <b>G30</b> = 30μ" Gold over Nickel	14-16AWG (2.0-2.5mm <sup>2</sup> )	13A
	SP14M2T	Pin Contact, Stamped & Formed, Size 16, 3 Tangs, Tin over Nickel	14-16AWG (2.0-2.5mm <sup>2</sup> )	13A
	SS14M2T	Socket Contact, Stamped & Formed, Size 16, 3 Tangs, Tin over Nickel	14-16AWG (2.0-2.5mm <sup>2</sup> )	13A
	SP16M2F	Pin Contact, Stamped & Formed, Size 16, 3 Tangs, Gold Flash over Nickel *Commonly Stocked Contacts	16-18AWG (0.75-1.5mm <sup>2</sup> )	13A
	SS16M2F	Socket Contact, Stamped & Formed, Size 16, 3 Tangs, Gold Flash over Nickel *Commonly Stocked Contacts	16-18AWG (0.75-1.5mm <sup>2</sup> )	13A
	SP16M2Gx	Pin Contact, Stamped & Formed, Size 16, 3 Tangs, Gold over Nickel <b>G5</b> = 5μ" Gold over Nickel; <b>G10</b> = 10μ" Gold over Nickel <b>G15</b> = 15μ" Gold over Nickel; <b>G30</b> = 30μ" Gold over Nickel	16-18AWG (0.75-1.5mm <sup>2</sup> )	13A
	SS16M2Gx	Socket Contact, Stamped & Formed, Size 16, 3 Tangs, Gold over Nickel <b>G5</b> = 5μ" Gold over Nickel; <b>G10</b> = 10μ" Gold over Nickel <b>G15</b> = 15μ" Gold over Nickel; <b>G30</b> = 30μ" Gold over Nickel	16-18AWG (0.75-1.5mm <sup>2</sup> )	13A
	SP16M2T	Pin Contact, Stamped & Formed, Size 16, 3 Tangs, Tin over Nickel	16-18AWG (0.75-1.5mm <sup>2</sup> )	13A
	SS16M2T	Socket Contact, Stamped & Formed, Size 16, 3 Tangs, Tin over Nickel	16-18AWG (0.75-1.5mm <sup>2</sup> )	13A
	SP20M2F	Pin Contact, Stamped & Formed, Size 16, 3 Tangs, Gold Flash over Nickel *Commonly Stocked Contacts	20-22AWG (0.34-0.50mm <sup>2</sup> )	13A

Image	Part Number	Description	Wire Range	Amp
	SS20M2F	Socket Contact, Stamped & Formed, Size 16, 3 Tangs, Gold Flash over Nickel *Commonly Stocked Contacts	20-22AWG (0.34-0.50mm <sup>2</sup> )	13A
	SP20M2Gx	Pin Contact, Stamped & Formed, Size 16, 3 Tangs, Gold over Nickel <b>G5</b> = 5μ" Gold over Nickel; <b>G10</b> = 10μ" Gold over Nickel <b>G15</b> = 15μ" Gold over Nickel; <b>G30</b> = 30μ" Gold over Nickel	20-22AWG (0.34-0.50mm <sup>2</sup> )	13A
	SS20M2Gx	Socket Contact, Stamped & Formed, Size 16, 3 Tangs, Gold over Nickel <b>G5</b> = 5μ" Gold over Nickel; <b>G10</b> = 10μ" Gold over Nickel <b>G15</b> = 15μ" Gold over Nickel; <b>G30</b> = 30μ" Gold over Nickel	20-22AWG (0.34-0.50mm <sup>2</sup> )	13A
	SP20M2T	Pin Contact, Stamped & Formed, Size 16, 3 Tangs, Tin Plating over Nickel	20-22AWG (0.34-0.50mm <sup>2</sup> )	13A
	SS20M2T	Socket Contact, Stamped & Formed, Size 16, 3 Tangs, Tin Plating over Nickel	20-22AWG (0.34-0.50mm <sup>2</sup> )	13A

**For more information, contact:** Customer Service, +1 800 394 7732, [csr@amphenol-sine.com](mailto:csr@amphenol-sine.com)

© 2021 Amphenol Sine Systems Corporation, 44274 Morley Drive, Clinton Township MI 48036 USA. [www.amphenol-sine.com](http://www.amphenol-sine.com). Customer Service +1 800 394 7732 Every effort has been made to ensure that the information contained in this document is accurate at the time of publication. Specifications or information stated in this document are subject to change without notice. 02/2021