


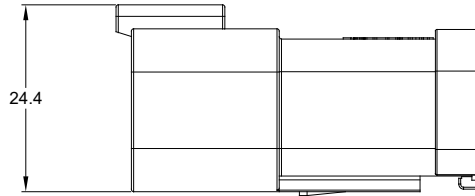

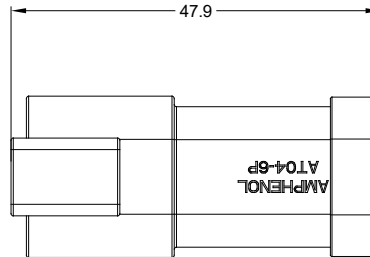


REVISIONS					
REV	ECO	DESCRIPTION	DATE	BY	APPR
A1	-	RELEASE NEW DRAWING	10APR18	ROOKIE	TOMMY
A2	-	REVISED DESCRIPTION	12JUN19	JAH	DH

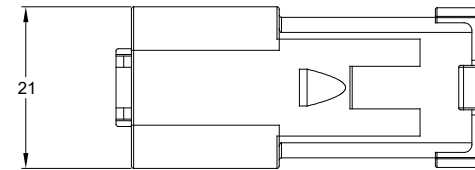

END CAP

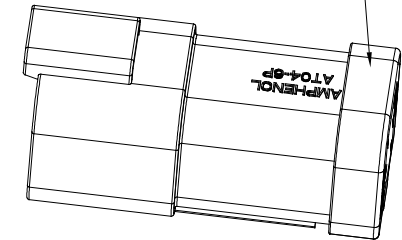

NOTES: UNLESS OTHERWISE SPECIFIED

- MATERIAL:
HOUSING: THERMOPLASTIC, BLACK
SEAL: SILICONE RUBBER
CONTACT: COPPER ALLOY
- MODIFICATIONS: BLACK, 2 PIECES OF 3 PIN BUSBAR WITH NICKEL PLATED
- SPECIFICATIONS:
3.1 CURRENT RATING: 13 AMPS MAXIMUM FOR THE 3 PIN BUSBAR
3.2 OPERATING TEMPERATURE: -55°C TO +125°C.
3.3 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE @ 1500 VOLTS AC.
3.4 INSULATION RESISTANCE: 1000 MEGOHM MIN @ 25°C.
3.5 MOISTURE RESISTANCE: IP67 (MATED CONDITION).
3.6 MATING CYCLE DURABILITY: 100 CYCLES
3.7 RoHS COMPLIANT

4. MATING PART: AT06-6S* PLUG
(* = AVAILABLE MODIFICATIONS)

5. ORIENTATION OF "Amphenol" AND "-EP14" TO BE OPTIONAL

6. BORDERS SIGNIFY THAT PINS 1,2,6 AND PINS 3,4,5 ARE BUSSED TOGETHER WITH 3 PIN BUSBARS.

7. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

AT04-6P-EP14		REF: DT046P-EP14	
PART NUMBER		DESCRIPTION	
QUANTITY	MATERIALS LIST		
UNLESS OTHERWISE SPECIFIED: 1) All dimensions are in metric (mm). 2) Tolerances are as follows: 1 PL DEC ±0.30 2 PL DEC ±0.15 3 PL DEC ±0.08 Fractions ±1/64 Angles ±1°		SIGNATURES DATE DRAWN: ROOKIE 10APR18 CHECKED: ORION 10APR18 ENGINEER: APPROVAL: TOMMY 10APR18	
MATERIAL SPECIFICATIONS:		CUSTOMER:	
PROCESS SPECIFICATIONS:		THIS DRAWING IS SUPPLIED FOR INFORMATION ONLY. DESIGN FEATURES, SPECIFICATIONS AND PERFORMANCE DATA SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUBJECT TO NORMAL MANUFACTURING VARIATIONS.	
NEXT ASSY:		SIZE: B C- DWG NO: AT04-6P-EP14 REVISION: A2	SCALE: NONE SHEET 1 OF 1

TITLE: HYPERBUSS AT 6WAY RECP (2)3 PIN BUSBAR NICKEL-PLATED BLACK
DWG NO: AT04-6P-EP14
REV: A2
SH: 1
OF: 1