
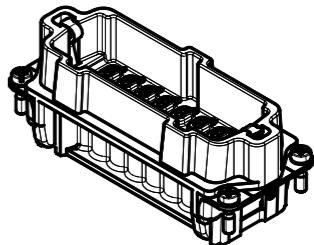
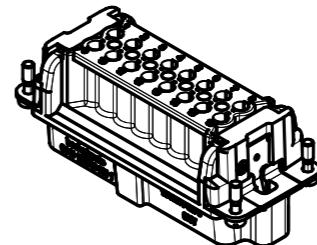
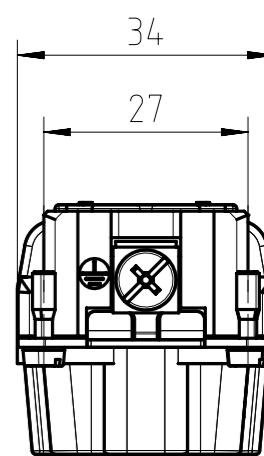
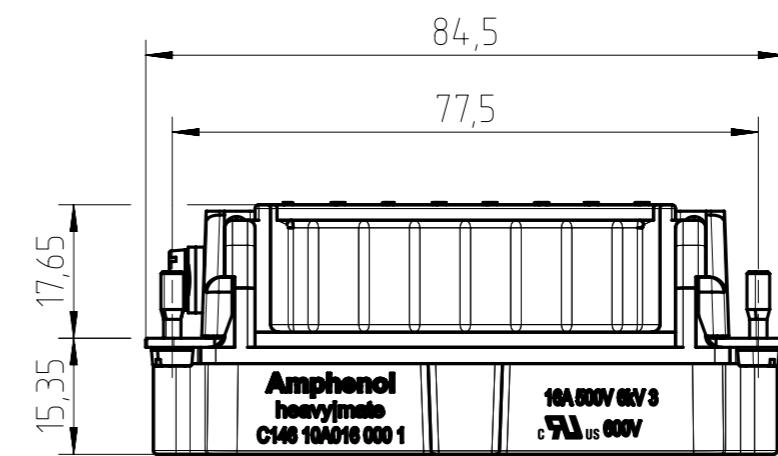



**INDUSTRIAL@AMPHENOL**  
TRUSTED GLOBALLY

*Copying of this document and giving it to others and the use or communication of the contents hereof are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of a patent or the registration of the utility model or design.*

General Characteristics	Standard	Value
number of contacts		16 + PE
termination technique		crimp
wire gauge		0,5 mm <sup>2</sup> - 4 mm <sup>2</sup> AWG 20 - AWG 12
max. insulation diameter		4,0 mm
flammability	UL 94	V-0
Electrical Characteristics	Standard	Value
rated voltage	IEC 60664-1	500 V (UL/CSA 600 V)
pollution degree	IEC 60664-1	3
installation (overvoltage) category	IEC 60664-1	3
material group	IEC 60664-1	3a
rated impulse withstand voltage	IEC 60664-1	6 kV
rated current T <sub>amb</sub> = 40 °C		16 A
current carrying capacity	IEC 60512-5-2	see derating curve
contact resistance	IEC 60512-2-1	≤ 5 mΩ
insulation resistance	IEC 60512-3-1	≥ 10 <sup>10</sup> Ω
Climatical Characteristics	Standard	Value
climatic category	IEC 60068-1	40 / 125 / 21
upper temperature	IEC 60512-11-9	+125 °C
lower temperature	IEC 60512-11-10	-40 °C
Mechanical Characteristics	Standard	Value
mechanical operation	IEC 60512-9-1	≥500 mating cycles
Materials	Standard	Value
insert		PC
contacts		CuZn (brass) / CuSn ( tin bronze)
contact plating		Ag (silver) / Au (gold)
color		grey

Alle technischen Daten wurden unter Laborbedingungen ermittelt und können im Praxisbetrieb abweichen.  
Es handelt sich bei den Angaben weder um Beschaffenheits- noch um Haltbarkeitsgarantien.  
*All technical data have been measured in a laboratory environment and can be different during practical usage of the product. Any product information is for descriptive usage only and not legally binding, particularly the information does not constitute or provide any legal guarantees ("Beschaffenheitsgarantie")*

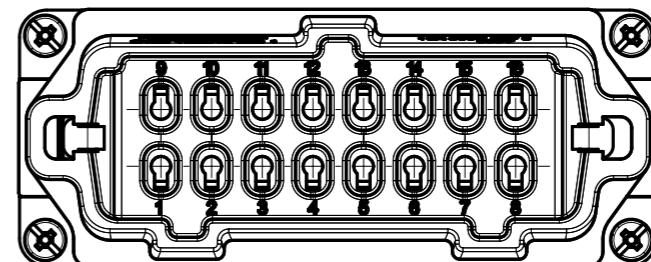

Gewicht (errechnet) / Calc WT : 50 g		Zul. Abw./Tolerances :	 DIN 1 ISO 13715	Maßstab / Scale : 1:1 (1:2)	A3	
<input type="checkbox"/> Prüfmaß / Testdimension		ISO 2768-m			CUSTOMER DRAWING	
Teileindex / Part index number:						
Bagatelle change:						
		Gez.	20.08.2018		Stifteinsatz 16-Pol + PE  <i>pin insert 16 pole + PE</i>	
		Drawn	PWOELFFLE			
		Status	Released			
		Gepr.	23.08.2018			
		Checked	MGRIMM			
		<b>Amphenol Tuchel Industrial GmbH</b>		M	C146 10A016 000 1	Blatt/Sheet
03	201800341			20.08.2018	PWOLF	
Index	Änderung/Description	Datum/Date	Name	Ers. f. / Replacement for : M-C146 10A016 000 1 Rev 02		
				NXM-V01		